


IKUS^{DX}

PRODUCT REFERENCES

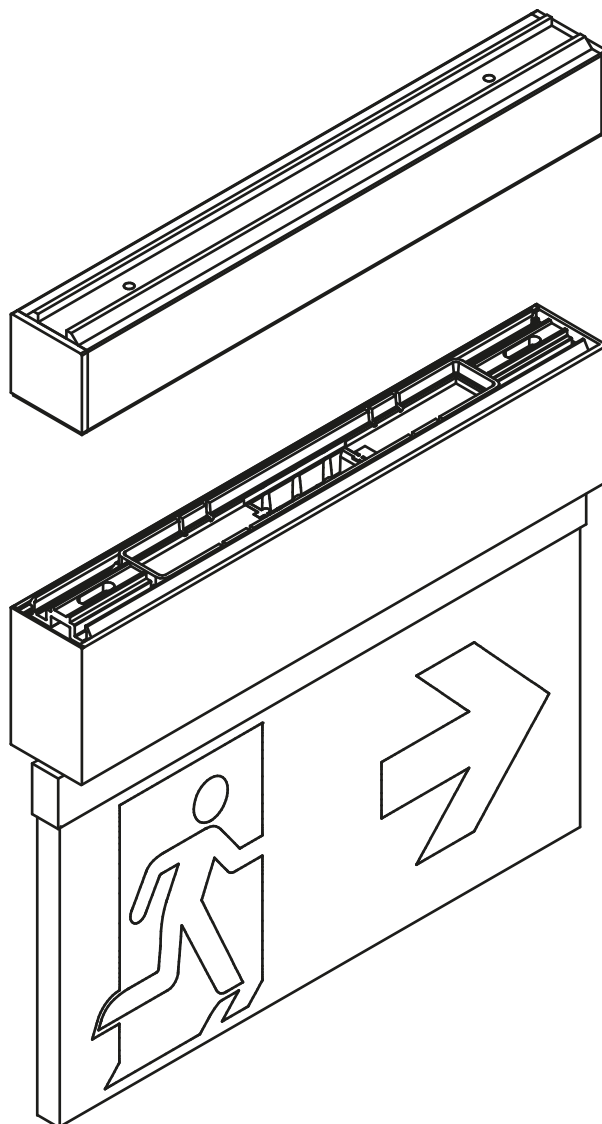

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS-T P	Ceiling-mounted	1h	NiCd	ILM _{LED}
IKUS-R P (2)	Track-mounted	1h	NiCd	ILM _{LED}
IKUS-M P	Ceiling-recessed	1h	NiCd	ILM _{LED}
IKUS-S P	Suspended	1h	NiCd	ILM _{LED}
IKUS-P P	Wall-mounted	1h	NiCd	ILM _{LED}
IKUS-B P	Wall-mounted pennant	1h	NiCd	ILM _{LED}
IKUS-T 1,5P	Ceiling-mounted	1,5h	NiCd	ILM _{LED}
IKUS-R 1,5P	Track-mounted	1,5h	NiCd	ILM _{LED}
IKUS-M 1,5P	Ceiling-recessed	1,5h	NiCd	ILM _{LED}
IKUS-S 1,5P	Suspended	1,5h	NiCd	ILM _{LED}
IKUS-P 1,5P	Wall-mounted	1,5h	NiCd	ILM _{LED}
IKUS-B 1,5P	Wall-mounted pennant	1,5h	NiCd	ILM _{LED}

IKUS 320x160 A
IKUS 320x160 TCA
IKUS 320x160 DALI

Specifically for Self-test
 Specifically for Self-test and DaisaTest system
 Specifically for DALI system

Include microprocessor for Self-test mode operation ^[A], DaisaTest centralised management system ^[TCA] or connection with DALI control unit ^[DALI]. Fill out the reference with ^[A], ^[TCA] or ^[DALI] depending on the model. Example of order: IKUS-T P A / IKUS-T P TCA / IKUS-T P DALI.

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS-T P <input type="checkbox"/>	Ceiling-mounted	1h	LiFePO ₄	ILM _{LED}
IKUS-R P <input type="checkbox"/> (2)	Track-mounted	1h	LiFePO ₄	ILM _{LED}
IKUS-M P <input type="checkbox"/>	Ceiling-recessed	1h	LiFePO ₄	ILM _{LED}
IKUS-S P <input type="checkbox"/>	Suspended	1h	LiFePO ₄	ILM _{LED}
IKUS-P P <input type="checkbox"/>	Wall-mounted	1h	LiFePO ₄	ILM _{LED}
IKUS-B P <input type="checkbox"/>	Wall-mounted pennant	1h	LiFePO ₄	ILM _{LED}
IKUS-T 2P <input type="checkbox"/>	Ceiling-mounted	2h	LiFePO ₄	ILM _{LED}
IKUS-R 2P <input type="checkbox"/> (2)	Track-mounted	2h	LiFePO ₄	ILM _{LED}
IKUS-M 2P <input type="checkbox"/>	Ceiling-recessed	2h	LiFePO ₄	ILM _{LED}
IKUS-S 2P <input type="checkbox"/>	Suspended	2h	LiFePO ₄	ILM _{LED}
IKUS-P 2P <input type="checkbox"/>	Wall-mounted	2h	LiFePO ₄	ILM _{LED}
IKUS-B 2P <input type="checkbox"/>	Wall-mounted pennant	2h	LiFePO ₄	ILM _{LED}
IKUS-T 3P <input type="checkbox"/>	Ceiling-mounted	3h	LiFePO ₄	ILM _{LED}
IKUS-R 3P <input type="checkbox"/> (2)	Track-mounted	2h	LiFePO ₄	ILM _{LED}
IKUS-M 3P <input type="checkbox"/>	Ceiling-recessed	3h	LiFePO ₄	ILM _{LED}
IKUS-S 3P <input type="checkbox"/>	Suspended	3h	LiFePO ₄	ILM _{LED}
IKUS-P 3P <input type="checkbox"/>	Wall-mounted	3h	LiFePO ₄	ILM _{LED}
IKUS-B 3P <input type="checkbox"/>	Wall-mounted pennant	3h	LiFePO ₄	ILM _{LED}

IKUS 320x160 - Luminaire Do not include battery. Luminaire specific function.

Model	Mounting	Power supply	Light Source	Communication
IKUS-T L	Ceiling-mounted	See finished	ILM _{LED}	No
IKUS-M L	Ceiling-recessed	See finished	ILM _{LED}	No
IKUS-S L	Suspended	See finished	ILM _{LED}	No
IKUS-P L	Wall-mounted	See finished	ILM _{LED}	No
IKUS-B L	Wall-mounted pennant	See finished	ILM _{LED}	No
IKUS-T L ELC (3)	Ceiling-mounted	See finished	ILM _{LED}	Si
IKUS-M L ELC (3)	Ceiling-recessed	See finished	ILM _{LED}	Si
IKUS-S L ELC (3)	Suspended	See finished	ILM _{LED}	Si
IKUS-P L ELC (3)	Wall-mounted	See finished	ILM _{LED}	Si
IKUS-B L ELC (3)	Wall-mounted pennant	See finished	ILM _{LED}	Si


Operation, shared data and notes:

The emergency luminaires equipped with LiFePO₄ battery technology include a pulse-load microprocessing system that enables an important reduction of energy consumption.


- (1) Maintained devices have two power supply inlets, LUM and EMERG, which can be turned off when the mains power is available.
- (2) Track-mounted models:
 - Do not have an independent input for LUM and remain always on. DALI models can be turned off via a DALI command.
 - Are not available in TCA references; if necessary, consult with Daisalux.
 - A options not have a remote control input.
 - Are suitable only for three-phase tracks. An adapter is included. Please check track compatibility with Daisalux.
- (3) The ELC luminaire models allow communication with CB and LPS equipment through the same power cable. Suitable for integration into DaisaTest centralised management system.

Protection rating: IP65 IK04


IKUS Ceiling-mounted IKUS-T



IKUS Track-mounted IKUS-R

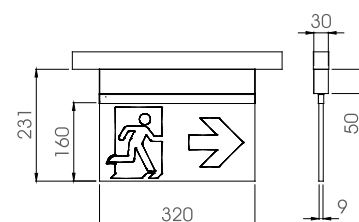

IKUS Ceiling-recessed IKUS-M

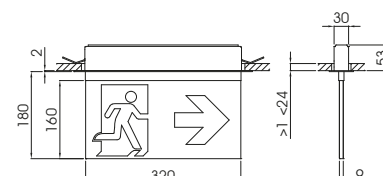

357 mm x 35 mm

FINISHES

Finish of	Description	Marking
Installation of emergency sigs: Ceiling-mounted Track-mounted Ceiling-recessed Suspended Wall-mounted pennant	Double-sided (as standard) Sign on both sides. For Wall-mounted pennant installations, the emergency sign must be ordered bearing in mind the diagram (4)	-----
	Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	(1RT)
Installation of emergency sigs: Wall-mounted	Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	-----

SG...

SALIDA

SG1600

SALIDA DE EMERGENCIA

SG1601

SALIDA

SG1602

SALIDA DE EMERGENCIA

SG1603

ZONA DE REFUGIO

SG1604

SG1605

SIN SALIDA

SG1606

SG1607

EXIT

SG1608

→

SG1610

←

SG1611

↓

SG1612

↑

SG1613

↘

SG1614

↙

SG1615

↗

SG1616

↖

SG1617

SG1618

→

SG1620

←

SG1621

↓

SG1622

↑

SG1623

↘

SG1624

↙

SG1625

↗

SG1626

↖

SG1627

SG1628

→

SG1630

←

SG1631

↓

SG1632

↑

SG1633

↘

SG1634

↙

SG1635

↗

SG1636

↖

SG1637

SG1638

→

SG1640

←

SG1641

↓

SG1642

↑

SG1643

SORTIE

SG1609

SG: 320x160 mm.
Customised signs and emergency signs supplied to order.

	Silver grey (as standard)	-----
Profile colour	Black	(N)
	White	(B)
Power supply		
Self-contained	220-230V 50/60Hz	-----
	110-127V 50/60Hz	(110-127V)
Luminaires (Do not include batteries)	110-240V AC 50/60Hz 170-320V DC	-----
	24V AC 50/60Hz 18-30V DC. ELC models only 18-30V DC	(24V)

ACCESSORIES

Reference	Description	Diagram
KMSGP IKUS	Kit for Surface cable input, for IKUS in silver grey	<div><div>KMSx IKUS32</div><div><div><div><div>320</div><div>33</div><div>20</div><div>30</div><div>ø20</div></div><div><div>320</div><div>160</div></div></div></div></div>
KMSN IKUS	Kit for Surface cable input, for IKUS in black	
KMSB IKUS	Kit for Surface cable input, for IKUS in white	
	For Ceiling-mounted, Wall-mounted and Suspended models.	

IKUS Suspended
IKUS-S

IKUS Wall-mounted
IKUS-P

IKUS Wall-mounted pennant
IKUS-B (4)

DAISALUX

Emergency lighting

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS2222-T P	Ceiling-mounted	1h	NiCd	ILMLED
IKUS2222-R P (2)	Track-mounted	1h	NiCd	ILMLED
IKUS2222-M P	Ceiling-recessed	1h	NiCd	ILMLED
IKUS2222-S P	Suspended	1h	NiCd	ILMLED
IKUS2222-P P	Wall-mounted	1h	NiCd	ILMLED
IKUS2222-B P	Wall-mounted pennant	1h	NiCd	ILMLED
IKUS2222-T 1,5P	Ceiling-mounted	1,5h	NiCd	ILMLED
IKUS2222-R 1,5P	Track-mounted	1,5h	NiCd	ILMLED
IKUS2222-M 1,5P	Ceiling-recessed	1,5h	NiCd	ILMLED
IKUS2222-S 1,5P	Suspended	1,5h	NiCd	ILMLED
IKUS2222-P 1,5P	Wall-mounted	1,5h	NiCd	ILMLED
IKUS2222-B 1,5P	Wall-mounted pennant	1,5h	NiCd	ILMLED

IKUS 220x220 A Specifically for Self-test
IKUS 220x220 TCA Specifically for Self-test and DaisaTest system
IKUS 220x220 DALI Specifically for DALI system

Include microprocessor for Self-test mode operation ^[A] DaisaTest centralised management system ^[TCA] or connection with DALI control unit ^[DALI]. Fill out the reference with ^[A] ^[TCA] or ^[DALI] depending on the model. Example of order: IKUS2222-T P A / IKUS2222-T P TCA / IKUS2222-T P DALI.

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS2222-T P <input type="checkbox"/>	Ceiling-mounted	1h	LiFePO4	ILMLED
IKUS2222-R P <input type="checkbox"/> (2)	Track-mounted	1h	LiFePO4	ILMLED
IKUS2222-M P <input type="checkbox"/>	Ceiling-recessed	1h	LiFePO4	ILMLED
IKUS2222-S P <input type="checkbox"/>	Suspended	1h	LiFePO4	ILMLED
IKUS2222-P P <input type="checkbox"/>	Wall-mounted	1h	LiFePO4	ILMLED
IKUS2222-B P <input type="checkbox"/>	Wall-mounted pennant	1h	LiFePO4	ILMLED
IKUS2222-T 2P <input type="checkbox"/>	Ceiling-mounted	2h	LiFePO4	ILMLED
IKUS2222-R 2P <input type="checkbox"/> (2)	Track-mounted	2h	LiFePO4	ILMLED
IKUS2222-M 2P <input type="checkbox"/>	Ceiling-recessed	2h	LiFePO4	ILMLED
IKUS2222-S 2P <input type="checkbox"/>	Suspended	2h	LiFePO4	ILMLED
IKUS2222-P 2P <input type="checkbox"/>	Wall-mounted	2h	LiFePO4	ILMLED
IKUS2222-B 2P <input type="checkbox"/>	Wall-mounted pennant	2h	LiFePO4	ILMLED
IKUS2222-T 3P <input type="checkbox"/>	Ceiling-mounted	3h	LiFePO4	ILMLED
IKUS2222-R 3P <input type="checkbox"/> (2)	Track-mounted	3h	LiFePO4	ILMLED
IKUS2222-M 3P <input type="checkbox"/>	Ceiling-recessed	3h	LiFePO4	ILMLED
IKUS2222-S 3P <input type="checkbox"/>	Suspended	3h	LiFePO4	ILMLED
IKUS2222-P 3P <input type="checkbox"/>	Wall-mounted	3h	LiFePO4	ILMLED
IKUS2222-B 3P <input type="checkbox"/>	Wall-mounted pennant	3h	LiFePO4	ILMLED

IKUS 220x220 - Luminaire Do not include battery. Luminaire specific function.

Model	Mounting	Power supply	Light Source	Communication
IKUS2222-T L	Ceiling-mounted	See finished	ILMLED	No
IKUS2222-M L	Ceiling-recessed	See finished	ILMLED	No
IKUS2222-S L	Suspended	See finished	ILMLED	No
IKUS2222-P L	Wall-mounted	See finished	ILMLED	No
IKUS2222-B L	Wall-mounted pennant	See finished	ILMLED	No
IKUS2222-T L ELC (3)	Ceiling-mounted	See finished	ILMLED	Si
IKUS2222-M L ELC (3)	Ceiling-recessed	See finished	ILMLED	Si
IKUS2222-S L ELC (3)	Suspended	See finished	ILMLED	Si
IKUS2222-P L ELC (3)	Wall-mounted	See finished	ILMLED	Si
IKUS2222-B L ELC (3)	Wall-mounted pennant	See finished	ILMLED	Si


Operation, shared data and notes:

The emergency luminaires equipped with LiFePO4 battery technology include a pulse-load microprocessing system that enables an important reduction of energy consumption.


- Maintained devices have two power supply inlets, LUM and EMERG, which can be turned off when the mains power is available.
- Track-mounted models:
 - Do not have an independent input for LUM and remain always on. DALI models can be turned off via a DALI command.
 - Are not available in TCA references; if necessary, consult with Daisalux.
 - A options not have a remote control input.
 - Are suitable only for three-phase tracks. An adapter is included. Please check track compatibility with Daisalux.
- The ELC luminaire models allow communication with CB and LPS equipment through the same power cable. Suitable for integration into DaisaTest centralised management system.

Protection rating: IP65 IK04


IKUS Ceiling-mounted IKUS2222-T



IKUS Track-mounted IKUS2222-R



IKUS Ceiling-recessed IKUS2222-M

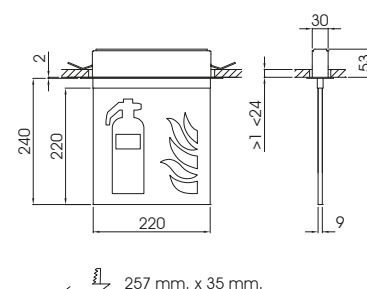









257 mm. x 35 mm.

FINISHES

Finish of	Description	Marking
Installation of emergency sigs: Ceiling-mounted Track-mounted Ceiling-recessed Suspended Wall-mounted pennant	Double-sided (as standard) Sign on both sides. For Wall-mounted pennant installations, the emergency sign must be ordered bearing in mind the diagram (4)	-----
	Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	(1RT)
Installation of emergency sigs: Wall-mounted	Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	-----

SG...



SG: 220x220 mm.
Customised signs and emergency signs supplied to order.


Profile colour	Silver grey (as standard)	-----
	Black	(N)
	White	(B)

Power supply		
Self-contained	220-230V 50/60Hz	-----
	110-127V 50/60Hz	(110-127V)
Luminaires (Do not include batteries)	110-240V AC 50/60Hz 170-320V DC	-----
	24V AC 50/60Hz 18-30V DC. Models ELC sólo 18-30V DC.	(24V)


ACCESSORIES

Reference	Description	Diagram
KMSGP IKUS22	Kit for Surface cable input, for IKUS in silver grey	 KMSx IKUS22
KMSN IKUS22	Kit for Surface cable input, for IKUS in black	
KMSB IKUS22	Kit for Surface cable input, for IKUS in white	
	For Ceiling-mounted, Wall-mounted and Suspended models.	


IKUS Suspended
IKUS2222-S

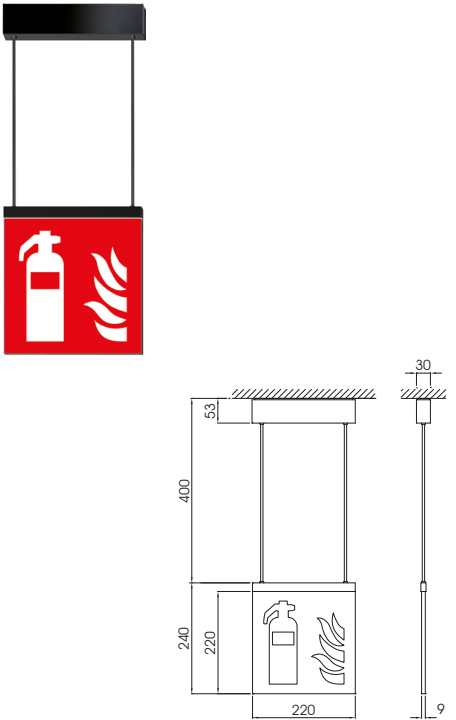

IKUS Wall-mounted
IKUS2222-P

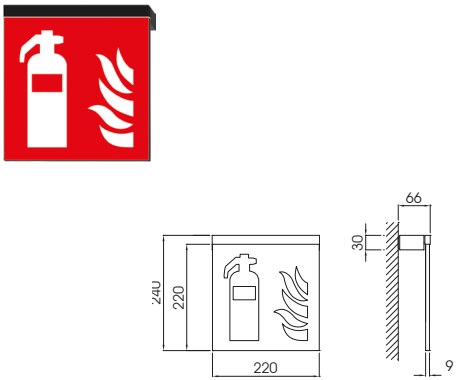

IKUS Wall-mounted pennant
IKUS2222-B (4)

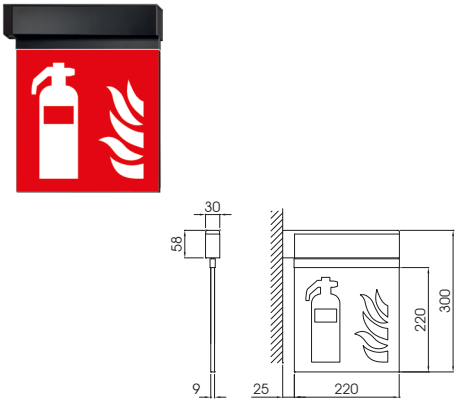

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS2211-T P	Ceiling-mounted	1h	NiCd	ILMLED
IKUS2211-R P (2)	Track-mounted	1h	NiCd	ILMLED
IKUS2211-M P	Ceiling-recessed	1h	NiCd	ILMLED
IKUS2211-S P	Suspended	1h	NiCd	ILMLED
IKUS2211-P P	Wall-mounted	1h	NiCd	ILMLED
IKUS2211-B P	Wall-mounted pennant	1h	NiCd	ILMLED
IKUS2211-T 1,5P	Ceiling-mounted	1,5h	NiCd	ILMLED
IKUS2211-R 1,5P	Track-mounted	1,5h	NiCd	ILMLED
IKUS2211-M 1,5P	Ceiling-recessed	1,5h	NiCd	ILMLED
IKUS2211-S 1,5P	Suspended	1,5h	NiCd	ILMLED
IKUS2211-P 1,5P	Wall-mounted	1,5h	NiCd	ILMLED
IKUS2211-B 1,5P	Wall-mounted pennant	1,5h	NiCd	ILMLED

IKUS 220x110 A
IKUS 220x110 TCA
IKUS 220x110 DALI

Specifically for Self-test
Specifically for Self-test and DaisaTest system
Specifically for DALI system

Include microprocessor for Self-test mode operation (A), DaisaTest centralised management system (TCA) or connection with DALI control unit (DALI). Fill out the reference with (A), (TCA) or (DALI) depending on the model. Example of order: IKUS2211-T P A / IKUS2211-T P TCA / IKUS2211-T P DALI.

Model	Mounting	Duration	Battery	Light Source
Maintained:(1)				
IKUS2211-T P □	Ceiling-mounted	1h	LiFePO4	ILMLED
IKUS2211-R P □ (2)	Track-mounted	1h	LiFePO4	ILMLED
IKUS2211-M P □	Ceiling-recessed	1h	LiFePO4	ILMLED
IKUS2211-S P □	Suspended	1h	LiFePO4	ILMLED
IKUS2211-P P □	Wall-mounted	1h	LiFePO4	ILMLED
IKUS2211-B P □	Wall-mounted pennant	1h	LiFePO4	ILMLED
IKUS2211-T 2P □	Ceiling-mounted	2h	LiFePO4	ILMLED
IKUS2211-R 2P □ (2)	Track-mounted	2h	LiFePO4	ILMLED
IKUS2211-M 2P □	Ceiling-recessed	2h	LiFePO4	ILMLED
IKUS2211-S 2P □	Suspended	2h	LiFePO4	ILMLED
IKUS2211-P 2P □	Wall-mounted	2h	LiFePO4	ILMLED
IKUS2211-B 2P □	Wall-mounted pennant	2h	LiFePO4	ILMLED
IKUS2211-T 3P □	Ceiling-mounted	3h	LiFePO4	ILMLED
IKUS2211-R 3P □ (2)	Track-mounted	3h	LiFePO4	ILMLED
IKUS2211-M 3P □	Ceiling-recessed	3h	LiFePO4	ILMLED
IKUS2211-S 3P □	Suspended	3h	LiFePO4	ILMLED
IKUS2211-P 3P □	Wall-mounted	3h	LiFePO4	ILMLED
IKUS2211-B 3P □	Wall-mounted pennant	3h	LiFePO4	ILMLED

IKUS 220x110 - Luminaire Do not include battery. Luminaire specific function.

Model	Mounting	Power supply	Light Source
IKUS2211-T L	Ceiling-mounted	See finished	ILMLED
IKUS2211-M L	Ceiling-recessed	See finished	ILMLED
IKUS2211-S L	Suspended	See finished	ILMLED
IKUS2211-P L	Wall-mounted	See finished	ILMLED
IKUS2211-B L	Wall-mounted pennant	See finished	ILMLED
IKUS2211-T L ELC	Ceiling-mounted	See finished	ILMLED
IKUS2211-M L ELC	Ceiling-recessed	See finished	ILMLED
IKUS2211-S L ELC	Suspended	See finished	ILMLED
IKUS2211-P L ELC	Wall-mounted	See finished	ILMLED
IKUS2211-B L ELC	Wall-mounted pennant	See finished	ILMLED

Operation, shared data and notes:

The emergency luminaires equipped with LiFePO4 battery technology include a pulse-load microprocessing system that enables an important reduction of energy consumption.

(1) Maintained devices have two power supply inlets, LUM and EMERG, which can be turned off when the mains power is available.


(2) Track-mounted models:

- Do not have an independent input for LUM and remain always on. DALI models can be turned off via a DALI command.
- Are not available in TCA references; if necessary, consult with Daisalux.
- A options not have a remote control input.
- Are suitable only for three-phase tracks. An adapter is included. Please check track compatibility with Daisalux.


(3) The ELC luminaire models allow communication with CB and LPS equipment through the same power cable. Suitable for integration into DaisaTest centralised management system.

Protection rating: IP65 IK04


IKUS Ceiling-mounted
IKUS2211-T

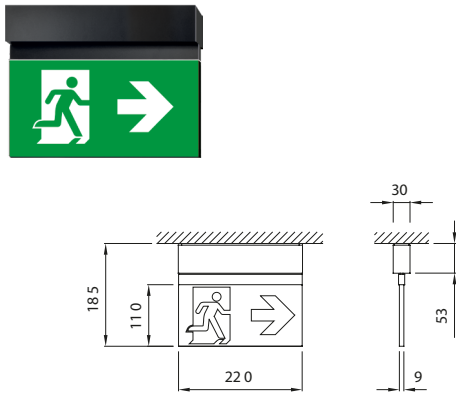



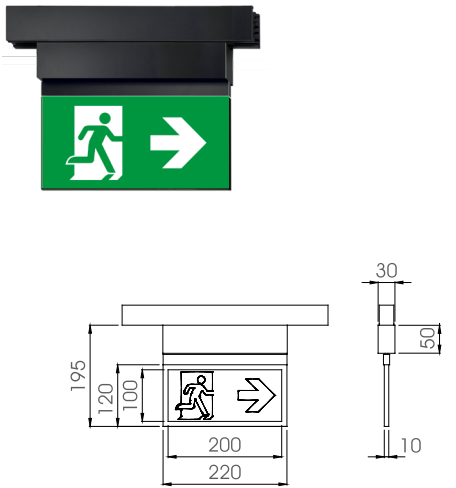



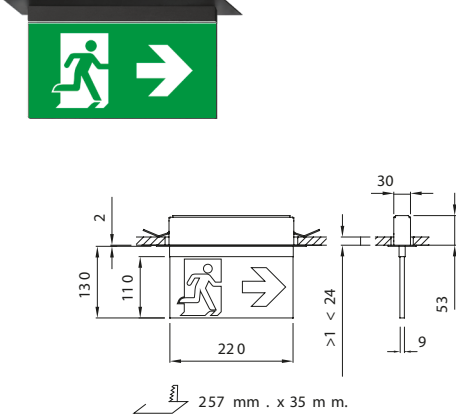


































IKUS Track-mounted
IKUS2211-R




IKUS Ceiling-recessed
IKUS2211-M




FINISHES

Finish of	Description	Marking
Installation of emergency sigs: Ceiling-mounted Track-mounted Ceiling-recessed Suspended Wall-mounted pennant	Double-sided (as standard) Sign on both sides. For Wall-mounted pennant installations, the emergency sign must be ordered bearing in mind the diagram (4) Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	----- (1RT)
Installation of emergency sigs: Wall-mounted	Single-sided The side with no emergency sign includes an opaque sheet that prevents light passing through.	-----
SG...	<div><div> SG1600</div><div> SG1601</div><div> SG1602</div><div> SG1603</div><div> SG1604</div><div> SG1605</div><div> SG1606</div><div> SG1607</div><div> SG1608</div></div> <div><div> SG1610</div><div> SG1611</div><div> SG1612</div><div> SG1613</div><div> SG1614</div><div> SG1615</div><div> SG1616</div><div> SG1617</div><div> SG1618</div></div> <div><div> SG1620</div><div> SG1621</div><div> SG1622</div><div> SG1623</div><div> SG1624</div><div> SG1625</div><div> SG1626</div><div> SG1627</div><div> SG1628</div></div> <div><div> SG1630</div><div> SG1631</div><div> SG1632</div><div> SG1633</div><div> SG1634</div><div> SG1635</div><div> SG1636</div><div> SG1637</div><div> SG1638</div></div> <div><div> SG1640</div><div> SG1641</div><div> SG1642</div><div> SG1643</div><div> SG1609</div></div>	
	SG: 220x110 mm. Customised signs and emergency signs supplied to order.	
	Silver grey (as standard)	-----
	Black	(N)
	White	(B)
Power supply:		
Self-contained	220-230V 50/60Hz	-----
	110-127V 50/60Hz	(110-127V)
Luminaires	110-240V 50/60Hz, 170-320V DC	-----
	24V 50/60Hz, 18-30V DC. Models ELC sólo 18-30V DC.	(24V)


ACCESSORIES

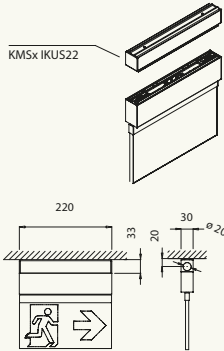Reference	Description	Diagram
KMSGP IKUS22	Kit for Surface cable input, for IKUS in silver grey	
KMSN IKUS22	Kit for Surface cable input, for IKUS in black	
KMSB IKUS22	Kit for Surface cable input, for IKUS in white	
For Ceiling-mounted, Wall-mounted and Suspended models.		


IKUS Suspended
IKUS2211-S

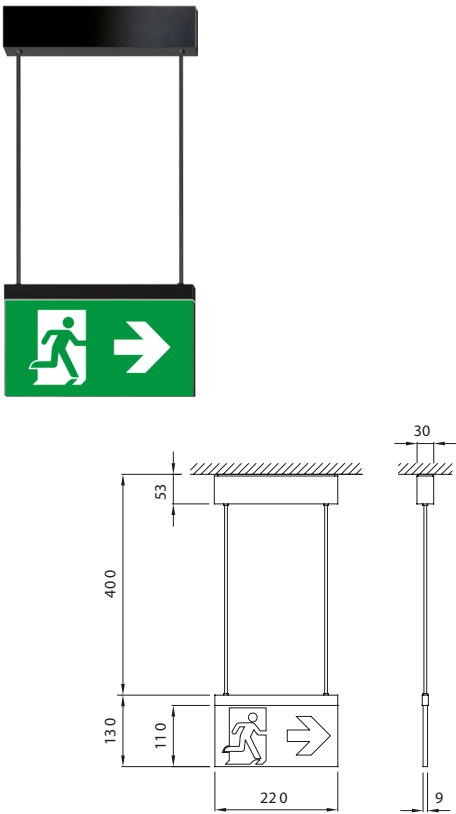

IKUS Wall-mounted
IKUS2211-P

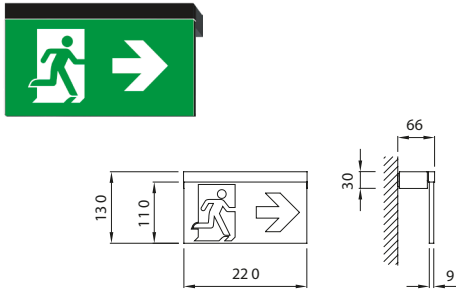

IKUS Wall-mounted pennant
IKUS2211-B (4)

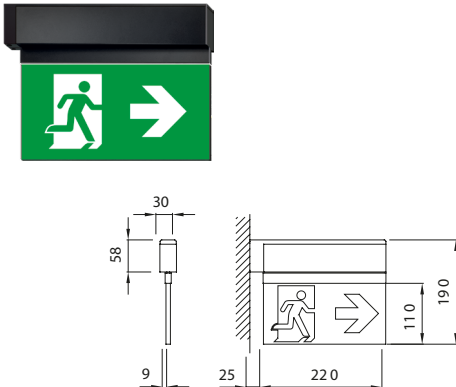



When light is a priority